




TABLE I: Maximum legal dimensions of motor vehicles

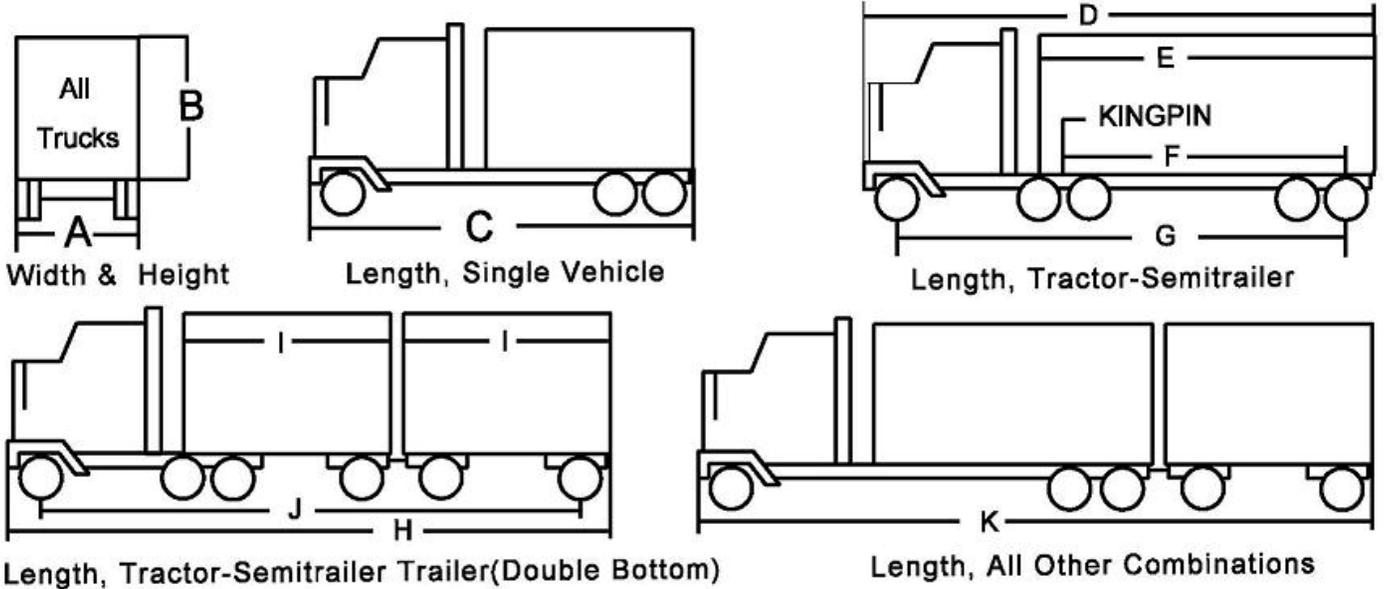

TYPE OF HIGHWAY OR STREET	MAXIMUM LEGAL DIMENSIONS											MAXIMUM WEIGHTS		
	A	B	C	D	E	F ⁴	G	H	I	J	K	SINGLE AXLE	TANDEM AXLE ²	GROSS ³
CLASS I	8' - 6"	13' - 6"	42'	N.S.	53'	45' - 6"	N.S.	N.S.	28' - 6"	N.S.	60'	20,000	34,000	II
CLASS II	8' - 6"	13' - 6"	42'	N.S.	53'	45' - 6"	N.S.	N.S.	28' - 6"	65'	60'	20,000	34,000	II
CLASS III	8'	13' - 6"	42'	65' ¹	53'	42' - 6"	55' ¹	60'	N.S.	N.S.	60'	20,000	34,000	II
OTHER STATE HIGHWAY	8'	13' - 6"	42'	65' ¹	53'	42' - 6"	55' ¹	80'	N.S.	N.S.	60'	18,000	32,000	III
LOCAL ROADS AND STREETS	8'	13' - 6"	42'	55'	N.S.	N.S.	N.S.	60'	N.S.	N.S.	60'	18,000	32,000	III

N.S. indicates legal dimension not specified.

Notes:

- 65 feet overall length (bumper to bumper) and/or 55 feet from center of front axle to center of rear axle.
- Tandem is defined as any 2 or more single axles whose centers are more than 40 inches and not more than 96 inches apart, measured to the nearest inch between extreme axles.
- See tables II and III.
- Applies on semitrailers longer than 48 feet.

Exceptions to WIDTH requirements above:

- Does not include certain safety devices approved by Department.
- Household goods carriers shall have access to points of loading and unloading and may have a maximum width of 8 feet 6 inches.
- A maximum width of 8 feet 6 inches is allowed on any street or highway to any point of loading or unloading for vehicle combinations that include a trailer or semitrailer not exceeding 28 feet 6 inches in length, which was originally part of a truck tractor-semi-trailer-trailer combination (double-bottom).
- Width restrictions do not apply to vehicles transporting implements of husbandry operating in the daytime. Loads of hay, straw or other similar farm products are limited to a maximum of 12 feet.

Exceptions to LENGTH requirements above:

- Length limits do not apply to vehicles operating in the daytime except on Saturdays, Sundays or legal holidays when transporting poles, pipes, machinery or other objects of a structural nature which cannot be readily dismembered, provided the length of the object being transported does not exceed 80 feet and the overall length of the load does not exceed 100 feet.
- Stinger-steered vehicles specifically designed to transport motor vehicles or boats may have an overall length of 75 feet plus overhang of 3 feet in front and 4 feet in the rear on Class I and II highways.
- Conventional auto transporters are vehicles specifically designed to transport motor vehicles or boats may have an overall length of 65 feet plus overhang on these highways. The maximum overall length on all other streets and highways is 60 feet.

General exceptions to above Table:

- All large vehicles operating on Class I highways shall have access for a distance of one mile on any street or highway to points of loading and unloading, and facilities for food, fuel, rest and repair.
- Large vehicles operating on designated state highways shall have access for a distance of 5 highway miles on any other state highway and on designated local streets and highways, to points of loading and unloading, and facilities for food, fuel, rest and repair. (This applies only on local streets and highways specifically designated and posted by local officials.)
- Permits may be issued for overdimensional objects and vehicles if they have been reasonably disassembled. Multiple objects loaded side-by-side, end-to-end, or on top of each other may not cause the overdimension.
- Streets or highways are designated by the Department of Transportation or local officials having jurisdiction.

Type of Highway or Street	Maximum Legal Dimensions											Maximum Weights		
	A	B	C	D	E	F	G	H	I	J	K	Single Axle	Tandem Axle	Gross
Class I, II, III Other State Highways and Local Roads And Streets	8'6" ¹	13'6"	42'	N.S. ²	N.S.	N.S.	N.S.	N.S.	N.S.	N.S.	60'	20,000 ³	See ⁴	See ⁵

Special Haul Vehicles


Notes:

- 8' on Class III, Other State Highways, Local Roads and Streets.
- 55' on Local Roads and Streets, 65' from designated State Highway (5 mile access law).
- 18,000 pounds on Other State Highways, Local Roads and Streets.
- Greater than 72" and not more than 96" may carry 18,000 pounds on each axle.
- Gross weight is determined by measuring to the nearest foot between extreme axles. (≤ 42' see Table III, >42' see Table II)


Maps of the designated state truck route system are available by calling 217/782-6271 and at www.gettingaroundillinois.com

TABLE II: Maximum gross weight for vehicles on Class I, II, and III highways of the designated state highway truck route system. Based on federal bridge formula. All special conditions and exceptions are not included on this form.


Distance	Maximum load in pounds on any 2 or more consecutive axles				Maximum loading for typical vehicles	
	2 axles	3 axles	4 axles	5 axles	6 axles	Vehicle or Combination Maximum Weight - Pounds
8	34,000	42,000				
9	38,000	42,500				
10	40,000	43,500				
11		44,000				
12		45,000	50,000			
13		45,000	50,500			
14		46,500	51,000			
15		47,000	51,500			
16		48,000	52,500	58,000		
17		48,500	53,500	58,500		
18		49,500	54,000	59,000		
19		50,000	54,500	60,000		
20		51,000	55,500	60,500	66,000	
21		51,500	56,000	61,000	66,500	
22		52,500	56,500	61,500	67,000	
23		53,000	57,500	62,500	68,000	
24		54,000	58,000	63,000	68,500	
25		54,500	58,500	63,500	69,000	
26		55,500	59,500	64,000	69,500	
27		56,000	60,000	65,000	70,000	
28		57,000	60,500	65,500	71,000	
29		57,500	61,500	66,000	71,500	
30		58,500	62,000	66,500	72,000	
31		59,000	62,500	67,500	72,500	
32		60,000	63,500	68,000	73,000	
33			64,000	68,500	74,000	
34			64,500	69,000	74,500	
35			65,500	70,000	75,000	
36			66,000	70,500	75,500	
37		Exception	66,500	71,000	76,000	
38			67,500	72,000	77,000	
39			68,000	72,500	77,500	
40			68,500	73,000	78,000	
41			69,500	73,500	78,500	
42			70,000	74,000	79,000	
43			70,500	75,000	80,000	
44			71,500	75,500		
45			72,000	76,000		
46			72,500	76,500		
47			73,500	77,500		
48			74,000	78,000		
49				78,500		
50				79,000		
51				80,000		




Axle 1 20,000
Axles 2,3 34,000
Axles 1,2,3 54,000



Axle 1 20,000
Axle 2 20,000
Axles 3,4 34,000
Axles 1,2 40,000
Axles 2,3,4 54,000
Axles 1,2,3,4 66,000



Axle 1 20,000
Axles 2,3 34,000
Axles 4,5 34,000
Axles 1,2,3 50,000
Axles 2,3,4,5 68,000
Axles 1,2,3,4,5 80,000



Axle 1 20,000
Axles 2,3 34,000
Axles 4,5,6 42,500
Axles 1,2,3 48,000
Axles 2,3,4,5,6 67,500
Axles 1,2,3,4,5,6 80,000

See Table IV for additional information on Special Haul Vehicles

- Notes:**
- 1 Measured to the nearest foot between the extremes of any group of two or more consecutive axles.
 - 2 Gross weights for 5 and 6 axles applicable only to a combination of vehicles.
 - 3 Two consecutive sets of tandems may carry 34,000 pounds each providing the overall distance between the first and last axles of such consecutive sets of tandems is 36 feet or more.
 - 4 If the distance between the centers of the first and third axles in a group of consecutive axles does not exceed 96 inches, the group is a tandem.
 - 5 Maximum single axle 20,000 pounds; maximum tandem 34,000 pounds.
 - 6 Combinations of vehicles designated as special haul vehicles which include a semitrailer manufactured prior to the model year 2004 and first registered in Illinois prior to January 1, 2005 having five axles with a distance of 42 feet or less between extreme may have a gross weight of 72,000 pounds provided the weight shall not exceed 18,000 pounds on a single axle or 32,000 pounds on a tandem. For such combinations manufactured subsequent to September 9, 1986, the minimum distance between the first and last axles of the two sets of tandems must be 18 feet 6 inches or more.
 - 7 Permits may be issued for an overweight load providing it consists of one object that cannot be reasonably dismantled or disassembled.

TABLE III: Maximum gross weight of vehicles NOT on the Designated State Highway Truck Route System.


Gr. Wt.	VEHICLE or COMBINATIONS	
	C	Gr Wt
36,000	15'	50,000
	16'	50,500
	17'	51,500
	18'	52,000
	19'	52,500
	20'	53,500
	21'	54,000
	22'	54,500
	23'	55,500
	24'	56,000
	25'	56,500

Gr. Wt.	VEHICLE or COMBINATIONS	
	B	Gr Wt
41,000	10'	41,000
42,000	11'	42,000
43,000	12'	43,000
44,000	13'	44,000
44,500	14'	44,500
45,000	15'	45,000
46,000	16'	46,000
47,000	17'	47,000
47,500	18'	47,500
48,000	19'	48,000
49,000	20'	49,000
50,000	21'	50,000

Gr Wt	COMBINATIONS	
	D	Gr Wt
72,000	42' or less	72,000
73,000	43'	73,000
73,280	44' or more	73,280

- Notes:**
- 1 Either axle on a two-axle vehicle may weigh 20,000 pounds providing the gross weight of the vehicle does not exceed 36,000 pounds and the vehicle is not part of a combination.
 - 2 Maximum single axle 18,000 pounds. Maximum tandem axle 32,000 pounds.
 - 3 Permits may be issued for an overweight load providing it consists of one object that cannot be reasonably dismantled or disassembled.

TABLE IV: Special Axle and Gross Weight Allowances for Special Haul Vehicles

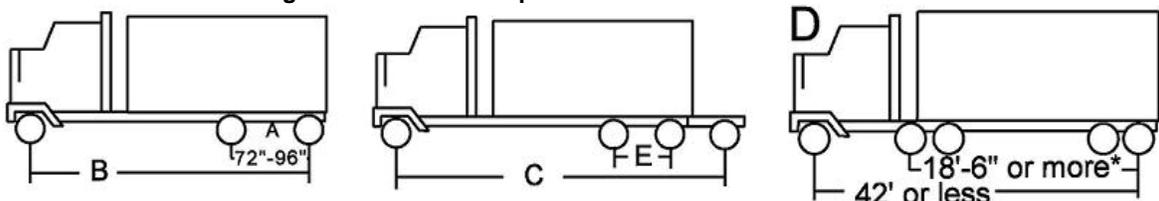

- | | |
|--|--|
| <p>Designated Truck Route System (Class I, II & III State Highways)</p> <ol style="list-style-type: none"> 18,000 lbs. on each axle - total of 36,000 lbs. See Table II See Table II Gross weight of 72,000 lbs., provided the weight shall not exceed 18,000 lbs. on a single axle or 32,000 lbs. on a tandem. | <p>Other State Highways and Local Roads & Streets</p> <ol style="list-style-type: none"> 18,000 lbs. on each axle - total of 36,000 lbs. See Table III See Table III Gross weight of 72,000 lbs. provided the weight shall not exceed 18,000 lbs. on a single axle or 32,000 lbs. on a tandem. 18,000 lbs. on each axle - total of 36,000 lbs. |
|--|--|

* This requirement does not apply to semitrailers manufactured before September 9, 1986.

Note: •Special Hauling Vehicles must meet width, height and length requirements as specified in Table I.
•4-axle concrete mixers are allowed the following maximum weights: 20,000 lbs. on any single axle; 36,000 lbs. on any series of 2 axles greater than 72 inches but not more than 96 inches; and 34,000 lbs. on any series of 2 axles greater than 40 inches but not more than 72 inches.